



Safe at Home with ROBINA

Looks like timber, feels like timber & sound like timber. But pay less and with more choices!

Get yourself spoiled with variety choices of designs, cozy, comfy, elegance, exotic, contemporary

> RB 2100 DE Halden Oak





1 Widely Certified and Attested by Various Professional Institutes (Please refer to page 22)



















2 Direct Manufacturer's Warranty (Please refer to page 20)



Wear And Tear Warranty



Fading Warranty




Warranty



Staining Warranty

Robina | Unique product components

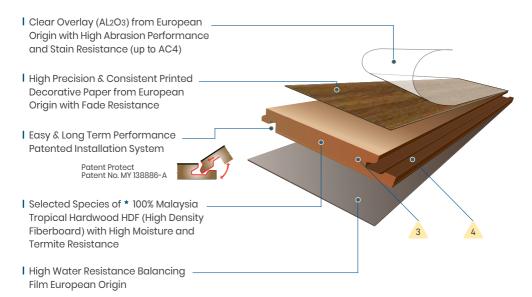

"High Quality 100% Malaysia Tropical Hardwood HDF produced In-House"





3 High Consistency of Moisture Resistance with In-House produced 100% Malaysia Tropical Hardwood HDF



Robina HDF < 8% Swelling



Non Tropical Hardwood HDF > 12% Swelling



Minimum Squeaking Noise & High Moisture Resistance with VEPS (Vacuum Edge Protection System)







Without VEPS



BASIC range | Product specifications











RB 2102 DE Roche Elm

- 5 years for heavy domestic use.
- 5 years for moderate commercial use.

RB 1901 DE Empire Oak





BASIC range | Deep Emboss • 8mm

Dimension - 196mm(W) x 1288mm(L) x 8mm(T) | 1 box = 8 panels (21.74sqft)









RB 2101 DE Gante Oak



RB 2102 DE Roche Elm



SELECT series | Product specifications



Standard - El Laminate Flooring



Abrasion Class - AC4



Thickness - 8mm



Surface - Deep Emboss (DE)



Surface - Silky Gloss (SG)



TWS217 DE Essence Oak

- 10 years for heavy domestic use.
- 5 years for moderate commercial use.

A11 DE Avenue Apple





SELECT series | Deep Emboss • 8mm

Dimension - 193mm(W) x 1283mm(L) x 8mm(T) | 1box = 8 panels (21.31sqft)









T13 DE Siam Teak

T18 DE Malmo Teak

T22 DE Sumatra Teak



SELECT series | Deep Emboss • 8mm

Dimension - 193mm(W) x 1283mm(L) x 8mm(T) | 1 box = 8 panels (21.31sqft)







SELECT series | Silky Gloss • 8mm

Dimension - 193mm(W) x 1283mm(L) x 8mm(T) | 1box = 8 panels (21.31sqft)





O131 SG Manet Oak



O136 SG Prestige Oak



O137 SG Weather Oak



NATURE collection | Product specifications

E1 Standard - E1 Laminate Flooring

Thickness - 8mm

Ac4 Abrasion Class - AC4





P16 DE Novecento Pine

- 10 years for heavy domestic use.
- 5 years for moderate commercial use.

EL11 DE Posh Elm





NATURE collection | Deep Emboss • 8mm Dimension - 193mm(W) x 1283mm(L) x 8mm(T) | 1 box = 8 panels (21.31sqft)







P16 DE Novecento Pine



NATURE collection | Product specifications











TWS211 SG Bristol Oak Allover

- 10 years for heavy domestic use.
- 5 years for moderate commercial use.

O115 SG Modern Oak





NATURE collection | Silky Gloss • 8mm Dimension - 193mm(W) x 1283mm(L) x 8mm(T) | 1 box = 8 panels (21.31sqft)





O135 SG Grey Waltham Oak



TWS211 SG Bristol Oak Allover



NATURE collection | Product specifications











TWS215-12 DE Arosa Oak

- 10 years for heavy domestic use.
- 5 years for moderate commercial use.



NATURE collection | Deep Emboss • 12mm



AVANT-GARDE

AVANT-GARDE collection | Product specifications

E

Standard - El Laminate Flooring



Abrasion Class - AC4



Thickness - 8mm



Surface - Silky Gloss (SG)



Micro V Groove - 2V



O122 2V-SG Lussac Oak

- 20 years for heavy domestic use.
- 15 years for moderate commercial use.

O117 2V-SG Whitewash Oak



AVANT-GARDE collection | Silky Gloss • 8mm | 2V Dimension - 193mm(W) x 1283mm(L) x 8mm(T) | 1 box = 8 panels (21.31sqft)





O122 2V-SG Lussac Oak



O125 2V-SG Caloria Oak



SLEEK collection | Product specifications



Standard - El Laminate Flooring



Abrasion Class - AC4



Thickness - 12mm



Surface - Silky Gloss (SG)



Micro V Groove - 4V



O120-12 4V-SG Millenium Oak

- 25 years for heavy domestic use.
- 15 years for moderate commercial use.

O118-12 4V-SG Exotic Oak

O120-12 4V-SG Millenium Oak

SLEEK collection | Silky Gloss • 12mm | 4V Dimension - 115mm(W) x 1283mm(L) x 12mm(T) | 1 box = 8 panels (12.7sqft)









O122-12 4V-SG Lussac Oak

Deep Emboss (DE)

Elegant embossing with imprinted glossy lacquering effects to enhance the visual and the touch senses of the surface.





Staining Warranty

(Stain resistance - according to test method EN 438-2,15)

Robina provides up to 25 years of manufacturer warranty for floorboard which has visible stains on the surface due to the following household substances: acetone, hand cream, fruit and vegetable drinks, fats, coffee, cola drinks, nail lacquer or similar products.



Wear And Tear Warranty

(Abrasion resistance - according to test method EN 438-2,6)

Robina provides up to 25 years of manufacturer warranty if floorboard surface is worn off in an area of at least one square centimetre on one panel.

Robina | Surface

Robina | Direct manufacturer warranty



Silky Gloss (SG)

This innovative surface texture is to induce the combination of matt and gloss finishes simultaneously, exuding the best rustic and exotic features of the decor.



Termite Warranty

Robina provides up to 10 years manufacturer warranty for floorboards which are deemed structural unfit by termite attack.



Fading Warranty

(Light fastness - according to test method EN 20105 B02 and EN 20105 A02)

Robina provides up to 25 years of manufacturer warranty for decor layer which has faded due to household lighting.

Terms and Conditions apply

The limited warranty only applies within the warranty period with the affected flooring area greater than one square centimetre on one panel. Proof of purchase attached with date of purchase must be presented to make a claim. The company reserves the right to inspect all reported defective products by the company authorized personnel before recognizing any claims. The company will replace the defective floorboard only at no charge; any others related materials and installation costs are excluded in the warranty.

For more information, please refer to the Robina Warranty Card or kindly log on www.robinaflooring.com.my



















Robina | Advantages



Vacuum Edge Protection System (VEPS)



Suitable For Underflooring Heating With Proper Installation Procedure



Existing Floor Need Not To Be Hacked



Household Chemicals Resistant



Glue Free Installation



Not Easily Flammable



Does Not Breed Dustmite



Authentic Direct Manufacturer Warranty





























MITI - Industrial Excellence Awards: Certificate of Excellence Export 2008 and Product Excellence Award 2010







Robina Flooring Commitments

to Environmental Sustainability

Robina | Certification & Attestation

- 1) Robina Flooring is MS ISO 9001 : 2015 certified. This certification ensures that the quality of our products is consistent and meets international standard requirements.
- (2) Robina Flooring is ISO 14001: 2015 certified. This certification ensures that the Environmental Management System (EMS) is consistent on the Environment Aspect and Environment Impact which meets the international standard requirements
- (3) The Attestation from the Fraunhofer- Institute for Wood Research, Wilhelm-Klauditz-Institut (WKI) testified that Robina Laminate Flooring complies to the international requirements acc. EN 13329
- 4 Robina Flooring is "Tested to Comply with CE Marking." CE Marking is represented the globally recognised symbol; is the "passport" for Robina Flooring to demonstrate it's "European Conformity."

- (5) Malaysia Green Label MYHIJAU -
- (6) Singapore Green Label Scheme
- (7) Taiwan Green Building Materials -
- (8) CSIRO Termite Report
- 9 Asia Pacific Book of Records 2006
- (10) Homedec 2011 Quality Award
- (1) Recognition awarded by the Malaysia Government towards Robina Flooring's efficient efforts in promoting the products worldwide, as well as continuous improvement of the quality management, product innovation and contribution to the eco-friendly practices.





MOULDINGS SKIRTING

Transition pg26


2 Endpg27

🐧 Nosing.....pg27

A PVC Skirting..... pg25

Adaptation pg26

UNDERLAYMENT







PE Foam

- ~ Thickness: 2 mm
- To compensate the un-evenness of the subfloor that = <3mm per 1m² area
- To absorb noise from the contact of flooring panel with the subfloor

Plastic Sheet


- ~ Thickness: 0.17 mm
- To act as a moisture barrier from the subfloor to the flooring panels


Acoustic Underlay


- ~ Thickness: 2 mm
- 2 in 1 excellent acoustic property and also act as moisture barrier from the subfloor to the floor panels
- ~ Exceptional comfort steps

Rubber Membrane

- ~ Thickness: 2.5 mm
- 2 in 1 excellent acoustic property and also act as moisture barrier from the subfloor to the floor panels
- Suitable for Home Theatre and equivalent

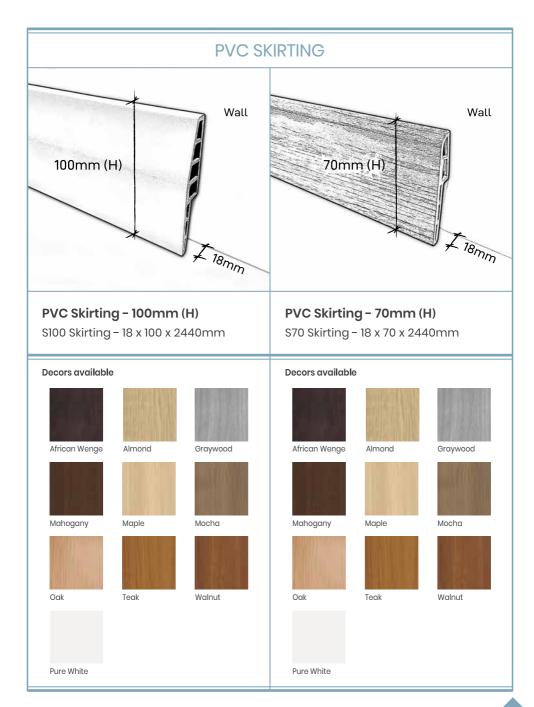

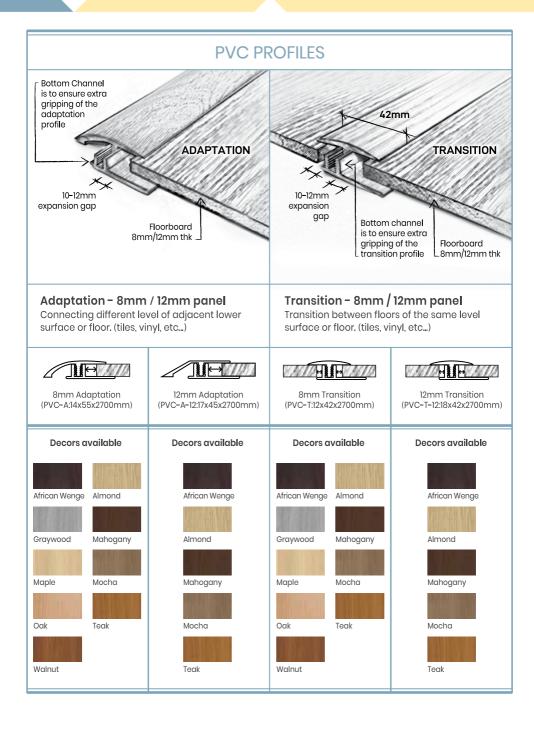

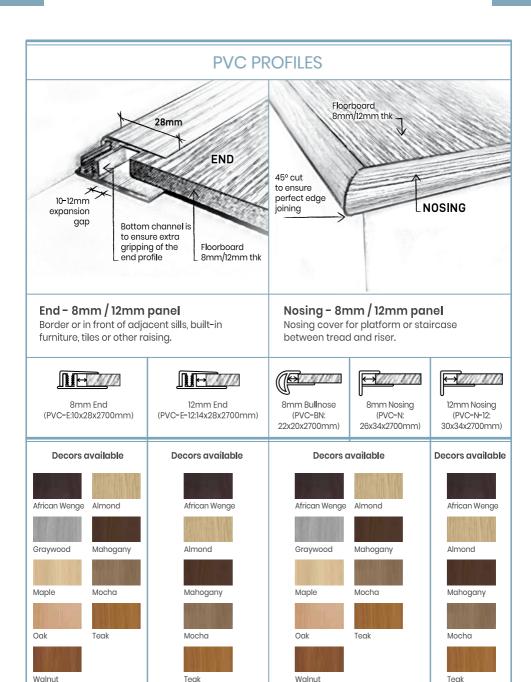

Distributed by

